

BA15 Dual & Single Contact LED Automotive Bulbs

15mm Bayonet base bulbs for tail/brake/turn light applications
 1157 (BA15D) - Dual Contact and Dual Intensity
 1156 (BA15S) - Single Contact and Single Intensity
 Select LED color to match vehicle lens color
 12VDC operation
 All types available in **White/Red/Amber**

24-LED 1156 & 1157 Bulbs

18 x 5mm LEDs, 6 x 3mm Radially Mounted LEDs
 Narrow 38 degree beam, Wide 100 degree beam



24-LED 1156/1157 Bulb

SPECIFICATIONS


Part No	Emitting Color	Operating Voltage Range Unit: VDC	Current Draw @ 12 Volts Unit: mA	Luminous Flux Unit: Lumens	Dominant Wavelength / CCT* Unit: nm / K	Beam Pattern Unit: degrees
1156-x24	White	9-14.8	75	30	8500	18/100
1157-x24	White	9-14.8	2481	15745	9500	18/100
1156-R24	Red	9-14.8	130	40	628	18/100
1157-R24	Red	9-14.8	2382	20760	628	18/100
1156-A24	Amber	9-14.8	90	50	593	18/100
1157-A24	Amber	9-14.8	2462	22788	593	18/100

Operating Temperature Range: -30°C to +85°C — Storage Temperature Range: -40°C to +100°C — Up to 10,000 hour life span
 *WAVELENGTH AND CCT ARE APPROXIMATE VALUES. ACTUAL VALUES MAY VARY. SEE OUR WEBSITE FOR MORE INFORMATION.

Adobe Reader 8 or later required to run interactive 3D PDF - [Click here to download](#)


1156-x24

18 x 5mm LEDs - 6 x 3mm radially mounted LEDs
[Click image for 3D view](#)

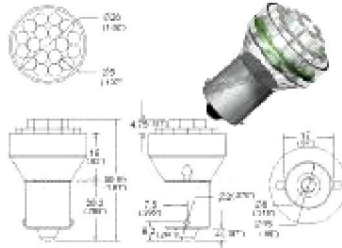

1157-x24

18 x 5mm LEDs - 6 x 3mm radially mounted LEDs
[Click image for 3D view](#)

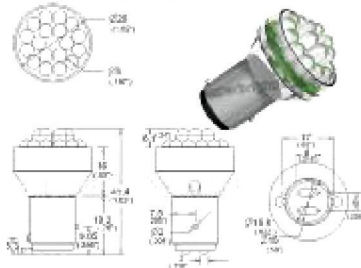

Click bases for dimensions and contact descriptions

